

FUNCTIONAL DESCRIPTION

10-BAY CHARGER

The R-Link 10-Bay charger may be used charge up to 10 R-Link watches simultaneously.

TECHNICAL SPECIFICATIONS

POWER

12V DC, 2.5A or 24V DC, 1.25A
110V - 250V mains adapter supplied as standard

CHARGE TIME

Fully discharged to 100%:	3 hours
8 hours use for HAV only to 100%:	1 hour
8 hours use for PPI & HAV to 100%:	2 hours

PHYSICAL & ENVIRONMENTAL

DIMENSIONS

Width:	226 mm
Depth:	334 mm
Thickness:	70 mm

WEIGHT


Empty weight: 900 grams

TEMPERATURE RANGE & HUMIDITY

Operating:	0°C to +40°C
Storage:	-20°C to +40°C.
Humidity:	up to 95% RH

ENVIRONMENT & INGRESS PROTECTION

Suitable for indoor use only
Maximum altitude: 2000m
Ingress protection: N/A

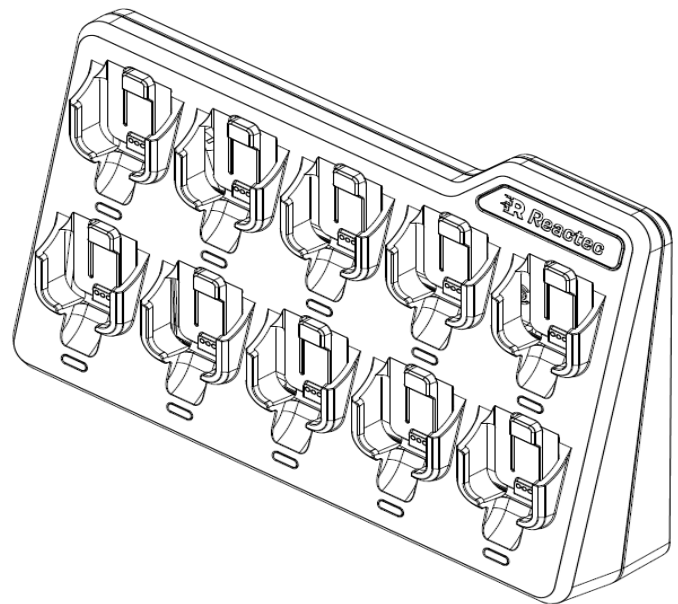

STANDARDS & CERTIFICATIONS

EMC & RADIO STANDARDS

EN55032, EN55035

SAFETY STANDARDS

BS EN IEC 62368-1



Reactec Ltd
Vantage Point House
3 Cultins Road
Edinburgh
EH11 4DF

If you require additional support, please email our technical support team:
helpdesk@reactec.com or call us at +44 (0)131 221 0921.

www.reactec.com/support/

Prevention engineering for workplace health.

