

FUNCTIONAL DESCRIPTION

2-BAY GATEWAY

All data collected by the R-Link watch is automatically and securely transmitted to the Reactec Analytics cloud-based software via a gateway device. For efficient end-of-day data management, each watch should be returned to a charger or a gateway equipped with charging docks. Up to three 10-bay chargers can be positioned within the communication range of a gateway, supporting a maximum of 32 watches.

TECHNICAL SPECIFICATIONS

POWER

12V DC, 2.5A or 24V DC, 1.25A
110V - 250V mains adapter supplied as standard

CHARGE TIME

Fully discharged to 100%	3 hrs
8hrs use for HAV only to 100%	1hr
8hrs use for PPI & HAV to 100%	2hrs

COMMUNICATIONS

Cellular communications:	GSM900, GSM1800, NB-IoT & LTE CAT-M1
Wi-Fi communications:	IEEE 802.11 b/g/n – compliant Supports 20MHz & 40MHz bandwidth in 2.4GHz band
Watch & Beacon communications:	Bluetooth Low Energy 5.0 Max Range: 80 meters


PHYSICAL & ENVIRONMENTAL

DIMENSIONS

Width:	163 mm
Depth:	168 mm
Thickness:	51 mm

WEIGHT

Empty weight:	400 grams
---------------	-----------

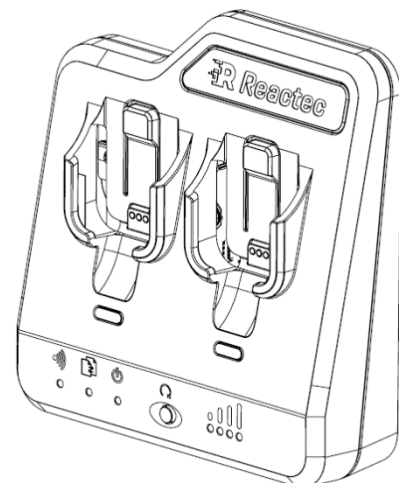

DATASHEET- RLG-002

TEMPERATURE RANGE & HUMIDITY

Operating:	0°C to +40°C
Storage:	-20°C to +40°C.
Humidity:	up to 95% RH

ENVIRONMENT & INGRESS PROTECTION

Suitable for indoor use only	
Maximum altitude:	2000m
Ingress protection:	N/A

STANDARDS & CERTIFICATIONS

EMC & RADIO STANDARDS

EN55032, EN55035, EN 301 489-1, EN 301 489-17, EN 301 489-52, EN 300 328, EN 301 511, EN 301 908-1, EN 301 901-13

SAFETY STANDARDS

EN62368-1, EN IEC 62311



Reactec Ltd
Vantage Point House
3 Cultins Road
Edinburgh
EH11 4DF

If you require additional support, please email our technical support team:
helpdesk@reactec.com or call us at +44 (0)131 221 0921.

www.reactec.com/support/

Prevention engineering for workplace health.

